

Sparse Matrix Factorization on Massively Parallel Computers

Anshul Gupta
Mathematical Sciences Dept.
IBM Watson Research Center
Yorktown Heights, NY 10598
anshul@watson.ibm.com

Seid Koric
NCSA
University of Illinois
Urbana, IL 61801
skoric@ncsa.uiuc.edu

Thomas George
Dept. of Computer Science
Texas A & M University
College Station, TX 77843
tgeorge@cs.tamu.edu

ABSTRACT

Direct methods for solving sparse systems of linear equations have a high asymptotic computational and memory requirements relative to iterative methods. However, systems arising in some applications, such as structural analysis, can often be too ill-conditioned for iterative solvers to be effective. We cite real applications where this is indeed the case, and using matrices extracted from these applications to conduct experiments on three different massively parallel architectures, show that a well designed sparse factorization algorithm can attain very high levels of performance and scalability. We present strong scalability results for test data from real applications on up to 8,192 cores, along with both analytical and experimental weak scalability results for a model problem on up to 16,384 cores—an unprecedented number for sparse factorization. For the model problem, we also compare experimental results with multiple analytical scaling metrics and distinguish between some commonly used weak scaling methods.

1. INTRODUCTION

The core computation in a large number of applications in science, engineering, and optimization involves solving large sparse systems of linear equations of the form $Ax = b$, where $A \in \mathbb{C}^{N \times N}$ is the sparse coefficient matrix, $b \in \mathbb{C}^N$ is the right hand-side vector, and $x \in \mathbb{C}^N$ is the vector of unknowns for which a solution is sought. These systems are typically solved using two classes of methods: (1) *iterative methods* that start with an initial approximation of the solution and iteratively refine it until the desired accuracy is achieved, and (2) *direct methods* that compute a factorization $A = LU$, where $L, U \in \mathbb{C}^{N \times N}$ are lower and upper triangular, respectively, and the solution x can be obtained by trivially solving the triangular systems $Ly = b$ and $Ux = y$.

A practically important class of sparse linear systems is one in which A is Hermitian and positive definite (referred to as symmetric positive-definite or SPD when A is real). A symmetric matrix can be regarded as the adjacency matrix

of a graph. It is well known [12, 32] that the total work involved in factoring the adjacency matrix of an N -node graph whose n -node subgraphs have $O(n^{2/3})$ -node separators is $O(N^2)$ with a nested-dissection [12] ordering. The corresponding memory requirement is $O(N^{4/3})$. Matrices that arise from finite-element or finite-difference discretizations of partial differential equations over three-dimensional (3D) domains belong to this class. Similar lower bounds for the time and space requirements in the two-dimensional case are $O(N^{3/2})$ and $O(N \log(N))$, respectively. Clearly, both the time and the memory requirements grow superlinearly with the size of the system being solved. On the other hand, there are preconditioners for Krylov subspace iterative methods that, at least in theory, can solve such systems in $O(N)$ space and $O(N)$ time. In practice however, the sparse systems arising in many applications can be too ill-conditioned for the iterative solvers to be effective. Also, in practice, $O(N)$ time is rarely achieved with an $O(N)$ -space preconditioner because the number of iterations required for satisfactory convergence invariably grows with the size of the system. Finally, despite a higher asymptotic complexity, direct solvers turn out to be much faster than iterative solver for moderately sized systems arising in many practical applications [11, 13, 14]. This is primarily because (1) a relatively inexpensive symbolic factorization phase computes the static structure of the factors to enable the subsequent numerical factorization phase to proceed with minimal use of expensive integer and pointer operations, and (2) supernodal [12] and multifrontal [8, 34] techniques ensure that practically all floating-point computation is performed by cache-friendly level 2 and level 3 basic linear algebra subprograms (BLAS) [7]. Direct solvers are extremely efficient in situations where several systems need to be solved with the same coefficient matrix. Direct solvers and the associated algorithms can also be useful in the context of iterative solvers; for example, as coarse-grid solvers for multigrid methods [35] or for computing preconditioners based on incomplete factorization [36]. Therefore, a high-performance and scalable parallel direct solver is an invaluable scientific computing tool.

In this paper, we experimentally and analytically explore the performance and scalability properties of the direct solver for symmetric positive definite (SPD) matrices in Watson Sparse Matrix Package (WSMP) [17]. Using matrices extracted from real applications that currently rely on direct solvers due to their robustness, we show that well designed algorithms for factorization [19] and triangular solution [25] can attain very high levels of performance and scalability.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. To copy otherwise, to republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee.

SC09 November 14-20, 2009, Portland, Oregon, USA.

Copyright 2009 ACM 978-1-60558-744-8/09/11 ...\$10.00.

We present strong scalability results on up to 8,192 CPUs for test data from real applications on three different massively parallel architectures. We observed sparse factorization speeds up to 4.6 Teraflops for a problem for which the factors require less than 3% of the memory of the machine. We also present both analytical and experimental weak scalability results for a model problem on up to 16,384 cores of a Blue Gene/P (BG/P) [29] machine. For our largest test case, the factorization required less than 2% of the available memory and attained 7.05 Teraflops. To the best of our knowledge, this is the highest performance and the utilization of the maximum number of cores for sparse matrix factorization reported to date. For the model problem, we also compare experimental results with multiple analytical scaling metrics and distinguish between some commonly used weak scaling methods.

The remainder of the paper is organized as follows. Section 2 introduces our experimental set up. In Section 3, we present our experience with iterative solvers on our suite of test problems. In Section 4, we compare the performance and scalability of three distributed-memory parallel direct solvers. In Section 5, we present performance and scalability results for WSMP’s symmetric direct solver on Cray XT4 and IBM BG/P computers. In Section 6, we present performance and scalability results for a comprehensive set of matrices derived from a model 3D problem on the BG/P. In Section 7, we present weak scalability analyses of symmetric sparse factorization algorithm under various criteria for increasing the problem size with the size of the machine and compare analytical and experimental results. Section 8 contains concluding remarks.

2. EXPERIMENTAL SETUP

In this section, we introduce the test matrices, the solver packages tried, and the hardware platforms used.

Table 1: SPD test matrices with their order (N) and number of non-zeros (NNZ).

Matrix	N	NNZ	Application
Brim6	665,017	107,514,163	Structural analysis
Mtrac	1,112,625	69,476,853	Structural analysis
Nastran-b	1,508,088	111,614,436	Structural analysis
Sgi_1M	1,522,431	125,755,875	Structural analysis
Ten-b	1,371,166	108,009,680	3D Metal forming

A large portion of the experiments reported in this paper are performed on five test matrices extracted from real applications that currently use a direct solver. Table 2 gives some basic details of these matrices. In addition to these matrices, we have used matrices derived from cubic 3-dimensional 7-point stencil finite-difference grids of varying sizes to present weak scaling results in Section 6.

Following is a brief description of the various iterative and direct solver packages used in this study. **Hypre** [9] (version 2.0.0), developed at Lawrence Livermore National Laboratory, is an iterative solver package designed for solving large, sparse systems on massively parallel computers. Hypre includes parallel preconditioners based on incomplete factorization or $IC(k)$ (Euclid [24]), sparse approximate inverses or SAI (ParaSails [6]), and algebraic multigrid or AMG (BoomerAMG [23]). **MUMPS** [4, 5] (version 4.7.3) is a distributed-memory parallel direct solver package for symmetric and unsymmetric systems and is based on the

parallel multifrontal method [8]. **SuperLU_DIST** [30, 31] (version 2.3) is the distributed-memory parallel version of the SuperLU family of solvers. It is based on supernodal right-looking LU factorization and is designed for general systems. Unlike symmetric solvers, it computes separate lower and upper triangular factors. Therefore, in practice, it would typically not be used to solve symmetric positive definite systems, which are the focus of our study. We have included SuperLU in our experiments to compare the scalability of various direct factorization algorithms. **WSMP** or Watson Sparse Matrix Package [17] (version 8.7) contains hybrid distributed- and shared-memory parallel direct solvers based on the multifrontal algorithm for both symmetric [18, 19] and unsymmetric [15] systems.

We used three very different hardware platforms to test the performance and scalability of WSMP’s direct solver for SPD matrices. These are a Blue Gene/P (BG/P) system with four 850 MHz 32-bit PowerPC 450 and 4 GB memory per node, a Cray XT4 system with a 2.3 GHz quad-core Opteron microprocessor and 4 or 8 GB memory per node, and two IBM p5-575 clusters with eight 1.9 GHz dual-core Power5+ microprocessors and 32 GB memory per node. The BG/P system is located at IBM T.J. Watson Research Center, the Cray XT/4 is at University of Bergen’s Center for Computational Science, and the two p5-575 clusters are located at Texas A&M University and at the National Center for Supercomputing Applications (NCSA) in Illinois. Both p5-575 clusters have the same nodes; however, the cluster at Texas A&M University has a faster switch. The experiments comparing the direct and iterative solvers reported in Section 3 were performed on the Texas A&M cluster, while those comparing the scalability of different direct solvers reported in Section 4 were performed on the NCSA cluster.

3. COMPARISON WITH ITERATIVE SOLVERS

Table 2: Hypre preconditioners and their parameter configurations used in the experiments.

Precond.	Ordering	Parameters	No. of Configs.
$IC(k)$	RCM, ND	<i>Levels of fill:</i> 0, 1, 2, 4, 6, 8	12
AMG	RCM, ND, NONE	<i>Aggressive coarsening levels:</i> 0, 10 <i>Coarsening schemes:</i> Falgout, HMIS, PMIS <i>Strong threshold:</i> 0.25, 0.5, 0.8, 0.9	72
SAI	RCM, ND, NONE	<i>Number of levels:</i> 0, 1, 2 <i>Threshold:</i> 0, 0.01, 0.1, -0.75, -0.9 <i>Filter:</i> 0, 0.001, 0.05, -0.9	81

In this section, we explore how WSMP’s direct solver compares with the *best-case* scenario for iterative solvers for solving systems with the five coefficient matrices listed in Table 2. George et al. [13] have conducted a fairly rigorous

Table 3: Memory and time statistics for the Hypre iterative and WSMP direct solvers on 64 processors.

Matrix	Solver	Failure rate	Median memory	Min. memory	Max. memory	Median time	Min. time	Max. time
Nastran-b	hypre-IC(k)	1/12	1.9e+10	4.1e+09	3.9e+10	137.	45.1	378.
	hypre-AMG	2/72	1.7e+09	1.0e+09	2.8e+10	109.	79.7	948.
	hypre-SAI	52/81	4.6e+09	2.3e+09	7.5e+09	156.	28.8	384.
	wsmp-DIRECT	0/1	9.1e+09	9.1e+09	9.1e+09	20.7	20.7	20.7
Sgi_1M	hypre-IC(k)	0/12	2.0e+10	4.2e+09	5.1e+10	110.	33.9	585.
	hypre-AMG	0/72	2.0e+09	1.2e+09	4.4e+10	66.5	46.4	783.
	hypre-SAI	15/81	2.8e+09	2.4e+09	8.8e+09	29.7	16.3	399.
	wsmp-DIRECT	0/1	1.6e+10	1.6e+10	1.6e+10	32.2	32.2	32.2

Table 4: Memory and time statistics for the Hypre iterative and WSMP direct solvers on 256 processors.

Matrix	Solver	Failure rate	Median memory	Min. memory	Max. memory	Median time	Min. time	Max. time
Nastran-b	hypre-IC(k)	0/2	4.0e+09	4.0e+09	4.0e+09	5.95	5.95	5.96
	hypre-AMG	0/4	1.2e+09	1.0e+09	2.3e+09	32.5	24.2	39.9
	hypre-SAI	0/4	5.8e+09	5.8e+09	5.8e+09	5.85	5.24	6.76
	wsmp-DIRECT	0/1	8.7e+09	8.7e+09	8.7e+09	7.03	7.03	7.03
Sgi_1M	hypre-IC(k)	0/2	4.2e+09	4.2e+09	4.2e+09	3.83	3.81	3.86
	hypre-AMG	0/4	1.4e+09	1.2e+09	2.7e+10	17.6	14.6	19.7
	hypre-SAI	0/4	5.9e+09	5.9e+09	5.9e+09	4.02	3.38	5.07
	wsmp-DIRECT	0/1	1.6e+10	1.6e+10	1.6e+10	11.1	11.1	11.1

comparison of the implementations of several state-of-the-art preconditioning methods for SPD systems in a number of iterative solver packages. From the results of that study, we concluded that the level-of-fill based incomplete Cholesky factorization or IC(k [24]), sparse approximate inverse preconditioner or SAI [6], and the algebraic multigrid preconditioner or AMG [23] available in the Hypre [9] package offered the best chances of providing a most robust, high-performance, and memory efficient solution in a highly parallel distributed-memory environment.

The performance and effectiveness of most preconditioners is not only problem dependent, but is also highly sensitive to various tunable parameters of the preconditioner as well as the choice of matrix preprocessing steps such as ordering and scaling etc. Having chosen the “best” [13] iterative solver package for SPD systems, we attempted to use the best configurations of its preconditioners for each matrix for a comparison with the direct solver. Using different combinations of various parameters, as shown in Table 3, we crafted 12 configurations for the IC(k) preconditioner, 72 for BoomerAMG, and 81 for ParaSails¹ and attempted to solve all five systems on 64 processors of an IBM p5-575 cluster. The conjugate gradient (CG) solver was used. Diagonal scaling was performed on all matrices and a right-hand side vector of all 1’s was used. A maximum of 2000 iterations were permitted and were stopped when the relative norm of residual dropped below 10^{-5} .

None of the configurations of any of the three preconditioners could solve systems with *Brim6*, *Mtrac*, and *Ten-b* as coefficient matrices. The statistics for the memory and time used by various preconditioners for the other two matrices on 64 CPUs are shown in Table 3. The table shows that for *Nastran-b*, Hypre-AMG had the most significant memory advantage over the direct solver. Both the median and

¹Not all combinations of parameters shown in Table 3 were used because some were not practical.

the minimum memory was small and only two of its 72 configurations failed. However, even its best configuration was about four times slower than the direct solver. Hypre-SAI had a large number failures. Although its best configuration performed well, the median value was much worse. For *Sgi_1M*, all preconditioners worked reasonably well.

Based on the results of our 64-CPU experiments, we chose the best configurations with respect to time and memory for both *Nastran-b* and *Sgi_1M* and tried them on 256 CPUs. The 256-processor memory and time results are summarized in Table 3. Since these were the best configurations for 64 CPUs, they performed very well compared to the direct solver. Two trends could be observed from these tables. First, going from 64 to 256 processors, all three preconditioners scale better than the direct solver. In fact, IC(k) tends to show superlinear speedup, for which we do not have an explanation yet (the number of iterations actually increased with the number of processors). The second observation is that the total memory usage of Hypre-SAI creeps up with the number of processors. As a result, it does not have a significant memory advantage over the direct solver on 256 CPUs, although, by virtue of its better scalability, the solution time of at least its best configuration is smaller than that of the direct solver for both the matrices.

To summarize the results of this section, iterative solvers are effective for only one or two of the five matrices, depending on the preconditioner and the number of processors used. Even in these cases, a careful selection of parameters is necessary, and it may not always be practical to perform extensive experimentation to select the best set of parameters in real-life situations. Note that these results are not meant to be indicative of iterative solvers’ performance in general. The test data is not random, but is obtained from hand-picked applications that use direct solvers. The purpose of these experiments is to show that a preference for direct solvers in these applications is justified and that di-

rect solvers, despite their cost, are indispensable for many applications. Therefore, it is desirable to develop highly parallel algorithms for them and study their performance and scalability properties.

4. COMPARISON WITH OTHER DIRECT SOLVERS

In this section, by means of experiments on an IBM p5-575 cluster, we compare WSMP's symmetric direct solver with two well known distributed-memory parallel direct solvers, namely MUMPS [4, 5] and SuperLU_DIST [30, 31]. These three direct solvers use different parallelization approaches for sparse factorization. Two types of parallelism are available for factoring sparse matrices. The first, *task parallelism*, views the entire computation as a task-dependency graph and seeks to perform independent tasks in parallel. The task dependency graph for factoring symmetric sparse matrices happens to be a tree, which is known as the elimination tree [33]. *Data parallelism* is the second type of parallelism available and pertains to multiple processes performing a computational task such as panel factorization or an update operation in parallel with the data involved in the operation distributed among the processes. Gupta et al. [19] analytically showed that one of the factors that determines the scalability of parallel sparse factorization is whether task parallelism, or data parallelism, or both are exploited. When data parallelism is exploited, the scalability is quite sensitive to data distribution. A two-dimensional distribution, where both the rows and the columns of the matrix or its submatrices are partitioned, leads to more scalable parallel formulations than a one-dimensional distribution involving partitioning of either rows or columns only. WSMP uses both task and data parallelism, gradually switching from the former to the latter as the number of independent tasks declines and their size increases. In the data parallel part, it uses a two-dimensional distribution. MUMPS also uses both task and data parallelism; however, with the exception of the root supernode of the elimination tree, it uses a one-dimensional partitioning in the data-parallel part. SuperLU_DIST uses data parallelism only with a two-dimensional distribution of data. Another recent distributed-memory parallel symmetric direct solver PaStiX [10, 22] is based on data parallelism with a two dimensional partitioning. We have not fully evaluated PaStiX yet, but expect its scalability to be similar to that of SuperLU_DIST due to the similarity of their parallelization approaches.

MUMPS and SuperLU_DIST are pure distributed-memory parallel solvers and perform best if the number of MPI processes is the same as the number of CPUs. WSMP and PaStiX, on the other hand, can use multithreaded MPI processes. As a result, a given number of CPUs can be utilized via multiple combinations of MPI processes and threads. We experimented with four such combinations for WSMP and show the results of using 1, 2, 4, and 8 threads per MPI process in this section.

Figures 1 and 2 show the performance of WSMP, SuperLU, and MUMPS for factoring the five test matrices² on up to 1024 CPUs of the p5-575 cluster. The data columns and the bars corresponding to WSMP- k T in these figures denote that k threads were used by each of the p/k MPI

²In most cases, MUMPS did not finish factoring $Ten-b$ within the two-hour limit specified for the batch jobs.

processes for utilizing p CPUs. Prior to factorization, the matrices were permuted using the default ordering scheme for each package. By default, WSMP uses its native ordering [16], SuperLU uses AMD [3], and MUMPS uses PORD [37]. Note that unlike WSMP and MUMPS, which factor only a triangular part of the symmetric matrix, SuperLU performs an LU factorization of the entire matrix because it has been designed for general sparse matrices. As a result, it performs twice the number of operations needed to factor a symmetric matrix, and its performance should be viewed in the light of this. However, the focus of the experiments in this section is to study the relative scalability of the solvers; i.e., their capacity to deliver increasing speedups with increasing number of CPUs.

The results in Figures 1 and 2 show that WSMP's factorization scales the best, followed by that of SuperLU_DIST. The highest factorization speed of nearly 2.2 Teraflops was obtained for the $Ten-b$ matrix with 512 MPI processes using two threads each. The number of threads per process affects the performance, and using multiple threads per process is almost always beneficial. In most cases, using 2 or 4 threads per MPI process delivers better performance than using single threaded processes. Performance appears to begin declining when 8 or more threads are used.

5. PERFORMANCE ON CRAY XT/4 AND BLUE GENE/P


Having observed the speedups on up to 1024 CPUs of a p5-575 cluster, we tested the solver on two other massively parallel platforms, the Cray XT4 and IBM Blue Gene/P, on which we could access an even higher number of processors. On both these machines, each node consists of four cores in an SMP configuration—AMD Opteron on the XT4 and PowerPC 450 on BG/P. Therefore, we used one multithreaded MPI process on each node and allowed it to use all four CPUs.

Figure 3 shows the factorization times and speed in Giga-flops for each of the five matrices in our test suite on the Cray XT4 on logarithmic scales. All experiments were conducted with 4 GB memory per node on 32 or more nodes and with 8 GB per node on fewer nodes. As the figure shows, with the exception of the smallest matrix $Mtrac$, the speedup continues to increase all the way up to 1024 nodes (4096 CPUs). The highest performance of 4.6 Teraflops was obtained for the largest matrix $Ten-b$.

Figure 4 depicts the same data for the BG/P. Once again, with the exception of $Mtrac$, the factorization time continues to decline up to 2048 nodes (8192 CPUs). Since BG/P nodes are slower than the XT4 nodes, the performance is proportionally lower. On an average, on the same number of nodes, the factorization code seems to run about three times faster on the XT4 than on BG/P. A peak performance of just over 2 Teraflops was obtained for $Ten-b$ on 2048 nodes. The scalability of the code, however, seems to be similar on both machines. For example, Table 5 shows the speedups of going to 1024 nodes from 32 nodes on both machines for all five matrices. These are the maximum and the minimum number of nodes for which we have data for all matrices on both machines, and the speedup numbers are quite close.


6. WEAK SCALING FOR A MODEL PROBLEM

#CPUs	Factorization Time [seconds]				SLU	MUMPS
	wsmp-1T	wsmp-2T	wsmp-4T	wsmp-8T		
8	101.	97.9	98.7	102.	732.	144.
16	56.7	57.9	55.3	59.7	374.	93.0
32	32.9	31.9	32.5	32.1	203.	59.8
64	16.7	20.4	18.8	19.3	128.	50.8
128	12.9	10.7	11.8	12.8	74.5	46.8
256	7.55	6.42	6.68	8.21	50.1	52.3
512	4.59	3.60	4.72	4.97	52.2	88.5
1024	2.43	2.22	2.32	2.93		

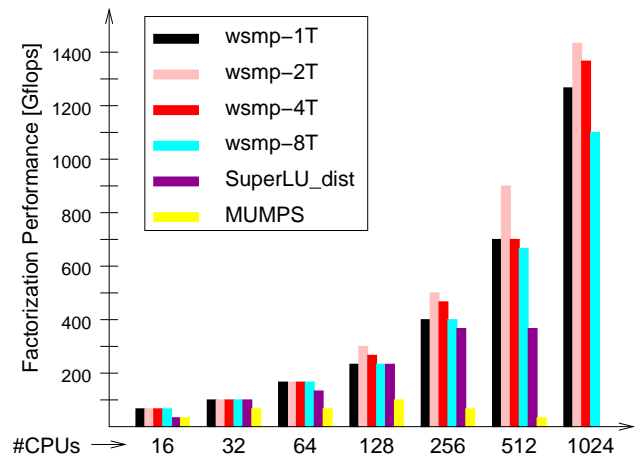


(a) *Brim6*

#CPUs	Factorization Time [seconds]				SLU	MUMPS
	wsmp-1T	wsmp-2T	wsmp-4T	wsmp-8T		
1	65.	65.	65.	65.	471.	98.9
8	16.	21.	19.	20.	92.9	28.0
16	11.	15.	16.	15.	54.3	17.0
32	6.9	10.	9.5	9.6	35.4	12.7
64	5.5	7.1	6.6	6.0	30.0	9.44
128	3.6	4.7	4.5	4.3	21.9	11.0
256	2.6	3.6	3.2	2.9	18.7	14.8
512	2.3	2.6	2.2	2.4	19.1	
1024	1.7	1.9	2.0	2.0		

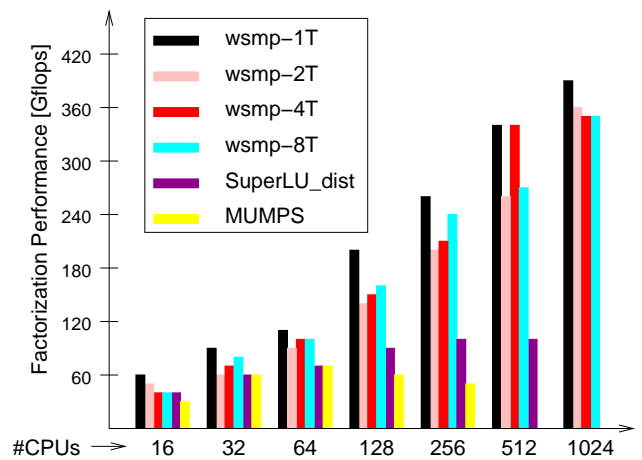

(b) *Mtrac*


#CPUs	Factorization Time [seconds]				SLU	MUMPS
	wsmp-1T	wsmp-2T	wsmp-4T	wsmp-8T		
8	83.4	96.4	89.8	72.9	1264	141.
16	43.8	57.8	47.3	46.7	607.	99.4
32	28.0	35.7	30.4	29.4	331.	67.0
64	16.2	22.5	18.8	20.0	298.	45.1
128	9.71	12.9	11.2	12.5	119.	34.3
256	6.04	7.30	6.60	7.57	86.3	33.9
512	4.18	5.63	4.49	5.10	87.4	48.2
1024	2.75	3.24	2.58	2.77		

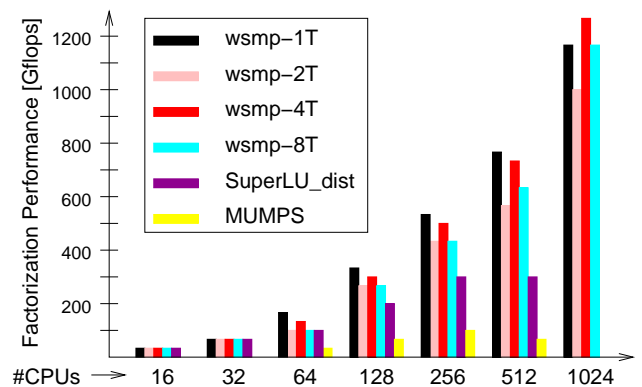

(c) *Nastran-b*

Figure 1: Factorization times and speeds of four different configurations of WSMP, SuperLU, and MUMPS for matrices *Brim6*, *Mtrac*, and *Nastran-b* on Power5+ cluster.

#CPUs	Factorization Time [seconds]					SLU	MUMPS
	wsmp-1T	wsmp-2T	wsmp-4T	wsmp-8T			
16	105.	116.	117.	119.	1612	233.	
32	64.9	67.7	66.4	58.4	875.	136.	
64	38.5	34.1	36.6	39.1	500.	87.5	
128	25.8	20.3	20.8	21.0	278.	67.6	
256	13.7	11.5	12.8	14.8	179.	56.5	
512	7.81	7.62	8.22	8.45	158.	68.4	
1024	4.48	3.97	4.18	5.30	157.		

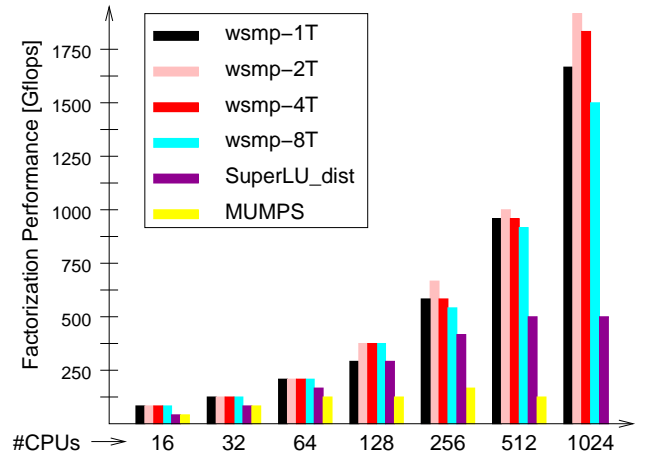(a) *Sgi_1M*

#CPUs	Factorization Time [seconds]					SLU
	wsmp-1T	wsmp-2T	wsmp-4T	wsmp-8T		
16	415.	469.	458.	477.	6813	
32	235.	280.	254.	252.	3514	
64	143.	153.	145.	155.	1845	
128	83.4	85.5	83.7	89.5	994.	
256	58.0	43.9	46.7	54.2	565.	
512	31.8	24.0	26.2	29.5	367.	
1024	17.5	13.8	14.7	18.0	360.	

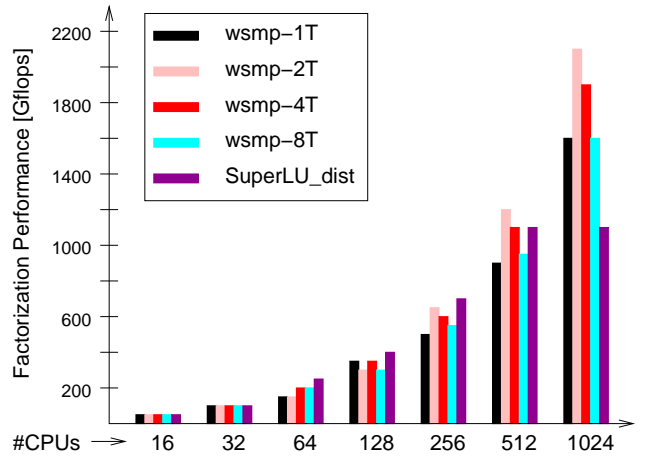
(b) *Ten-b*

Figure 2: Factorization times and speeds of four different configurations of WSMP, SuperLU, and MUMPS for matrices *Sgi_1M* and *Ten-b* on Power5+ cluster.

Table 5: Ratio of factorization time on 32-nodes to that on 1024 nodes of IBM BG/P and Cray XT4.

Machine	Brim6	Mtrac	Nastran-b	Sgi_1M	Ten-b
BG/P	10.2	5.12	11.4	12.6	13.5
XT4	10.5	6.29	8.65	11.3	13.2

In the previous sections, we used five fixed matrices to study the performance and scalability of WSMP's symmetric sparse factorization. Solving a fixed problem using an increasing number of processors almost always results in diminishing efficiencies (typically defined as the ratio of speedup to the number of processors). In this section, we use matrices derived from artificial cubic 3-dimensional 7-point stencil finite-difference grids of varying sizes for a more in-depth investigation of the scaling properties of this solver. Note that, unlike the matrices used earlier in the paper, the model finite difference problem is easily solvable using iterative methods and a direct solver would not be used in practice. The purpose of the experiments described in this

section is simply to use a set of matrices with varying size but similar structure.

Table 6 shows the performance of the factor and solve phases of WSMP's symmetric sparse direct solver over a fairly comprehensive set of matrices derived from the model cubic 3D finite difference problem. The experiments were performed on a BG/P system. Each row of data corresponds to a given number p of BG/P nodes, where p ranges from 1 to 4096. WSMP uses as many MPI processes as the number of nodes used, and each multithreaded process uses all the four CPUs on each node. The table contains five columns of data corresponding to increasing values of n , the dimension of the 3D cubic grid. Each major column of data (separated by double vertical lines) contains three subcolumns: the first one shows the value of n in bold font and the factorization efficiency E in a smaller font, the second one shows factorization time in seconds and speed in Gigaflops or Teraflops, and the third one shows the time and speed of the triangular solution phase for a single right-hand side vector. The values of n used in the table range between 20 and 232. Successive values of n are chosen such that the number of operations required for factorization increases by a factor of $2\sqrt{2}$ (ex-

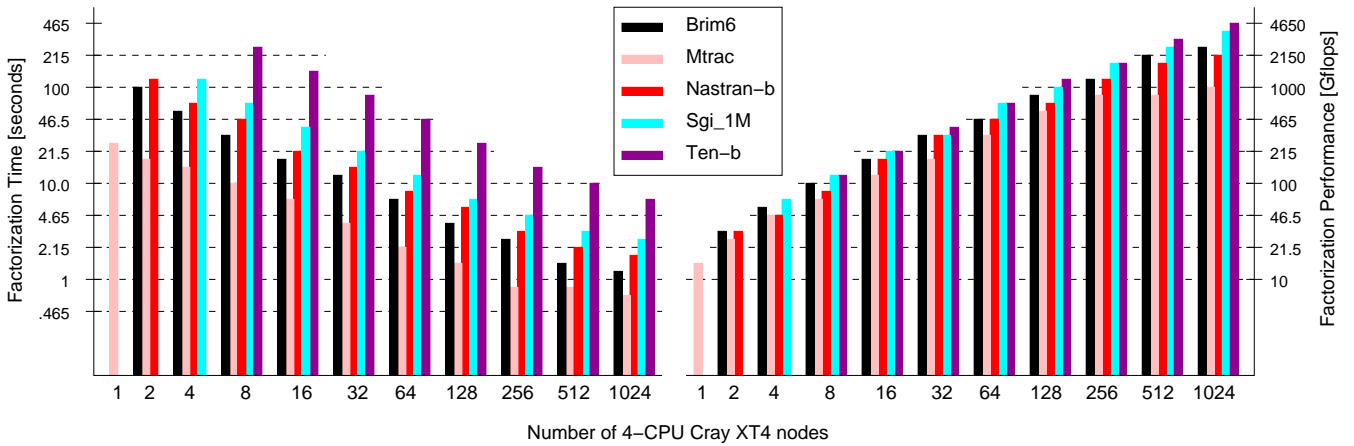


Figure 3: Factorization times and speeds for *Brim6*, *Mtrac*, *Nastran-b*, *Sgi_1M*, and *Ten-b* on logarithmic scales on Cray XT/4.

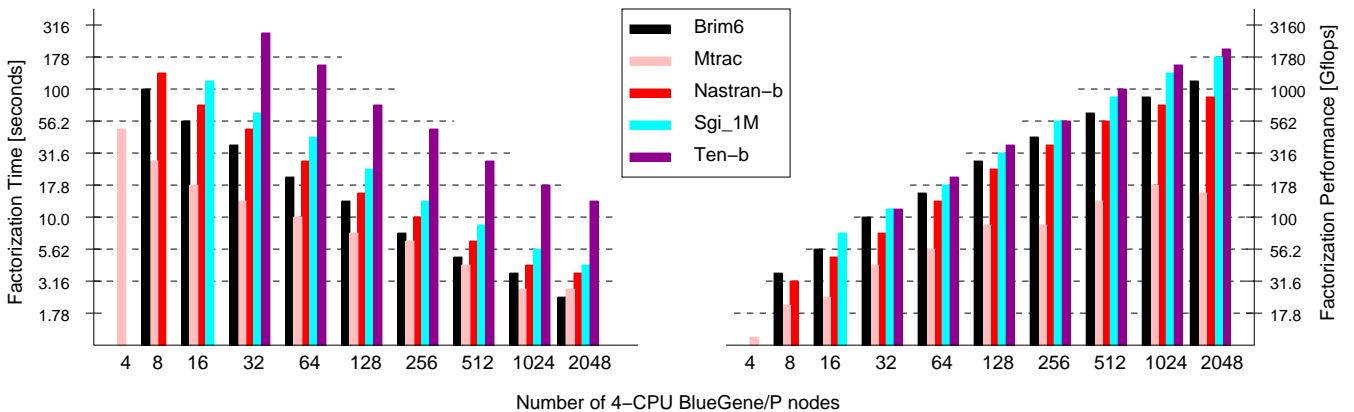


Figure 4: Factorization times and speeds for *Brim6*, *Mtrac*, *Nastran-b*, *Sgi_1M*, and *Ten-b* on logarithmic scales on IBM Blue Gene/P.

planation to follow in Section 7.2). The problem size or the total amount of work for the triangular solution phase grows as $O(p)$ along the columns. Five values of n were tried for each p . The values of n used in each row are shifted so that strong scalability results can be viewed along top-right to bottom-left diagonals and weak scalability results with the factorization problem size growing as $O(p^{1.5})$ can be viewed along the columns of the table.

Table 6 shows that factorization times for a fixed problem continue to decline up to 4096 nodes (16,384 cores) and the solve operation, which always takes well under a second to complete, continues to speed up until 2048 nodes. For the largest matrix (corresponding to $n = 232$) and the largest BG/P configuration with $p = 4096$, a maximum sustained speed of 7.05 Teraflops was obtained. To the best of our knowledge, this is the highest performance for sparse matrix factorization reported to date. A triangular factor of the matrix corresponding to $n = 232$ contains about 28 billion nonzeros. This amounts to less than 2% of the memory of a 4096-node BG/P with 4 Gbytes of memory per node. Hence, our largest test case is relatively small for a machine of this size, which can potentially handle much larger problems and deliver significantly higher speeds and efficiency for sparse matrix factorization. Currently, WSMP’s preordering phase

requires gathering all indices of the sparse matrix on a single node, which limits its ability to handle the matrix corresponding to the next value of $n = (2\sqrt{2} \times 232^6)^{1/6} \approx 276$. This limitation could have been overcome by using a fully distributed ordering such as ParMETIS [26]. Another consideration in using relatively small problem sizes for the large number of experiments required to gather the data for Table 6 was to conserve computational resources.

Just below each value of n in Table 6 is a fraction that represents the efficiency of factoring the matrix of dimension $N = n^3$ using the number of nodes p associated with that row of the table. Traditionally, parallel efficiency is defined as the ratio of parallel speedup to the number of processors. However, while scaling the problem size with the number of processors (or nodes), it is usually not possible to measure the speedup, which is the ratio of the parallel execution time to the best serial time for solving the same problem. The reason is that the problem attempted on p nodes may be too large to fit in the memory of a single node. In order to overcome this difficulty, we solved systems with increasing values of n on a single node and measured the speed $s_1(n)$ in Gigaflops. The largest system that could be solved on a single node corresponded to $n = 74$. The speed $s_1(74)$ was clocked at about 7.4 Gigaflops, which is little more than half of the

Table 6: Performance of factor and solve steps for various BG/P node counts (p) and matrix sizes (n^3). The matrices are derived from an $n \times n \times n$ 7-point stencil 3D finite difference mesh for several values of n ranging from 20 to 232.

p	n E	Factor	Solve	n E	Factor	Solve	n E	Factor	Solve	n E	Factor	Solve	n E	Factor	Solve
1	20 .29	.125 s 2.10 GF	.014 s .25 GF	24 .40	0.28 s 2.97 GF	0.03 s 0.3 GF	29 .49	0.74 s 3.59 GF	0.05 s 0.4 GF	34 .61	<u>1.64 s</u> 4.53 GF	0.08 s 0.4 GF	41 .69	4.57 s 5.07 GF	0.15 s 0.5 GF
2	24 .31	.185 s 4.50 GF	.015 s 0.5 GF	29 .39	0.46 s 5.74 GF	0.03 s 0.7 GF	34 .52	1.11 s 7.70 GF	0.04 s 0.9 GF	41 .59	2.72 s 8.68 GF	0.07 s 1.1 GF	48 .69	6.09 s 10.2 GF	0.13 s 1.2 GF
4	29 .29	0.33 s 8.44 GF	.015 s 1.2 GF	34 .36	0.69 s 10.7 GF	0.03 s 1.3 GF	41 .44	1.80 s 13.1 GF	0.05 s 1.5 GF	48 .55	4.02 s 16.1 GF	0.08 s 2.1 GF	58 .65	10.9 s 19.2 GF	0.14 s 2.5 GF
8	34 .26	0.48 s 15.5 GF	0.02 s 1.6 GF	41 .35	1.17 s 20.6 GF	0.04 s 2.1 GF	48 .42	2.58 s 24.9 GF	0.06 s 2.8 GF	58 .50	7.13 s 29.7 GF	0.10 s 3.3 GF	69 .57	17.7 s 33.6 GF	0.20 s 3.7 GF
16	41 .25	0.77 s 29.2 GF	0.03 s 2.7 GF	48 .33	<u>1.66 s</u> 38.9 GF	0.04 s 4.1 GF	58 .41	3.82 s 48.2 GF	0.06 s 5.5 GF	69 .48	9.71 s 56.8 GF	0.09 s 7.6 GF	82 .54	24.0 s 63.7 GF	0.19 s 7.6 GF
32	48 .24	<u>1.11 s</u> 57.1 GF	0.04 s 4.1 GF	58 .30	2.64 s 70.4 GF	0.05 s 7.3 GF	69 .39	5.95 s 92.9 GF	0.07 s 9.6 GF	82 .45	13.8 s 107. GF	0.11 s 13. GF	97 .53	36.5 s 124. GF	0.18 s 17. GF
64	58 .25	1.75 s 117. GF	0.04 s 8.6 GF	69 .33	<u>3.81 s</u> 155. GF	0.06 s 12. GF	82 .39	9.46 s 182. GF	0.09 s 17. GF	97 .47	21.9 s 221. GF	0.14 s 23. GF	116 .53	56.6 s 251. GF	0.22 s 29. GF
128	69 .25	2.58 s 232. GF	0.06 s 13. GF	82 .31	5.93 s 293. GF	0.08 s 19. GF	97 .39	13.4 s 366. GF	0.11 s 28. GF	116 .45	34.8 s 424. GF	0.17 s 40. GF	138 .50	88.0 s 470. GF	0.27 s 48. GF
256	82 .23	<u>3.80 s</u> 436. GF	0.07 s 21. GF	97 .31	8.32 s 579. GF	0.10 s 31. GF	116 .38	20.6 s 712. GF	0.14 s 45. GF	138 .44	50.2 s 838. GF	0.22 s 64. GF	164 .50	127. s 941. GF	0.33 s 79. GF
512	97 .21	5.86 s 0.81 TF	0.10 s .03 TF	116 .28	13.4 s 1.07 TF	0.14 s .05 TF	138 .35	31.4 s 1.31 TF	0.20 s .07 TF	164 .42	75.1 s 1.58 TF	0.27 s .10 TF	195 .46	199. s 1.74 TF	0.43 s .12 TF
1024	116 .19	10.5 s 1.42 TF	0.14 s .05 TF	138 .25	<u>22.0 s</u> 1.92 TF	0.19 s .07 TF	164 .32	49.1 s 2.44 TF	0.26 s .10 TF	195 .39	116. s 2.96 TF	0.38 s .13 TF	232 .45	289. s 3.40 TF	0.56 s .18 TF
2048	138 .16	17.3 s 2.39 TF	0.20 s .07 TF	164 .22	35.5 s 3.31 TF	0.27 s .09 TF	195 .28	81.6 s 4.22 TF	0.37 s .13 TF	232 .33	185. s 5.04 TF	0.52 s .19 TF			
4096	164 .13	30.7 s 3.92 TF	0.29 s .09 TF	195 .18	63.0 s 5.33 TF	0.39 s .13 TF	232 .23	139. s 7.05 TF	0.57 s .18 TF						

theoretical peak for a BG/P node. We assume that $s_1(74)$ is the maximum speed that a single BG/P node can deliver on this problem. We then computed the factorization efficiency for each (p, n) pair as $s_p(n)/ps_1(74)$, where $s_p(n)$ is the measured speed in Gigaflops of factoring the matrix corresponding to the $n \times n \times n$ grid on p nodes. This efficiency computation also mitigates, to some extent, a usual complication in reconciling experimental and analytical performance and scalability results. The analysis typically considers factors like communication overhead and load-imbalance, but does not usually account for the fact that the speed at which computations are performed can change with the number of processors. Sometimes, the speed of computation improves with an increasing number of processors due to a larger net cache size; however, in most numerical applications, including sparse and dense matrix factorization, the computation speed declines with an increasing number of processors because of progressively shorter temporal and spatial streams of computation and data between the communication steps. As a result of computing the efficiency relative to the maximum obtainable speed on a single node, the single node efficiencies for $n < 74$ are less than the ideal value of 1.0, thus capturing the impact of smaller blocks of data. This makes it fairer to compare these with the efficiencies when the number of processors and n are increased.

7. WEAK SCALING ANALYSIS OF THE 3D MODEL PROBLEM

In this section, we review some prior analytical scalability results for solving sparse systems arising from problems involving discretization of 3D domains, derive scalability results for additional scaling criteria, and compare the analytical results with the experimental results presented in Section 6.

7.1 Definitions and assumptions

We start by introducing the following terminology, which will be used in the remainder of the section. *Number of processes* (p), which is equivalent to the number of nodes in the context of this paper, is the number of MPI processes used to solve a given instance of the problem. Due to the hierarchical nature of parallelism used in the sparse factorization implementation being studied, we will use the number of processes or nodes in lieu of the number of processors, which is often used in the analysis of parallel algorithms. Each node may have multiple CPUs that are utilized by means of a multithreaded single-node code in our implementation. We regard a node as the basic processing element that hosts a single MPI process and communicates with other nodes. *Problem size* (W) is a measure of total amount of work required to solve the problem and is usually expressed in terms of the number of basic operations needed to solve the problem. When expressed in order terms, it is the sequential time complexity of the problem. Since the problem size is related to the serial execution time by a constant, we also use W to denote the execution time on a single process. A coefficient matrix of dimension $N = n^3$ resulting from an $n \times n \times n$ grid requires $O(N^2)$ or $O(n^6)$ operations [12, 32]. Similarly, the problem size for the triangular solution phase is $O(N^{4/3})$ or $O(n^4)$. (assuming that the heuristic used for computing the nested-dissection ordering indeed generates $O(n^{2/3})$ -node separators for n -node

subgraphs). *Parallel Execution Time* (T_P) is the time to solve a problem in parallel and is a function of the number of processes p and the problem size W . When the problem size is expressed as a function of a parameter of the input size, such as the matrix dimension N in our case, then T_P can be expressed as a function of p and N . Gupta et al. [19] have shown that for the model problem being considered in this section, a lower bound on T_P of WSMP's sparse factorization algorithm is $\Omega(\frac{N^2}{p} + \frac{N^{4/3}}{\sqrt{p}})$. The first term is due to the computation that each node performs and the second term is a lower bound on the time spent in communication. *Total Parallel Overhead* (T_o) is the sum of all the overhead incurred due to parallel processing by all the processes. In our case, a lower bound on the total overhead due to the communication term in T_P would be $\Omega(N^{4/3}\sqrt{p})$. *Speedup* (S) is the ratio of the serial execution time W of the fastest serial algorithm to the parallel execution time T_P . *Efficiency* (E) is usually expressed as the ratio of speedup (S) to the number of processors (p). Thus, $E = \frac{W}{pT_P} = \frac{1}{1 + \frac{T_o}{W}}$.

7.2 Scalability analysis

It is well known that for a problem instance of a fixed size, the speedup of a parallel algorithm does not continue to increase with increasing number of processes and tends to saturate or peak at a certain value. The size of the problem must be increased with the number of processes for an increasing number of processes to be utilized efficiently—a concept loosely known as *weak scaling*. Various criteria have been studied for determining the rate at which the problem size must be increased (many of these are surveyed by Kumar and Gupta [27]). In this section, we discuss a few of these in the context of factorization of sparse symmetric matrices resulting from discretizing 3D domains.

Fixed efficiency scaling: Kumar and Rao [28] developed a scalability metric relating the problem size to the number of processors necessary for a speedup increase proportional to the number of processors. This metric is known as the *isoefficiency function*. Gupta et al. [19] have shown that the problem size must increase at least as $\Omega(p^{1.5})$ for WSMP's sparse Cholesky factorization to maintain a fixed efficiency.

Fixed memory scaling: Increasing the problem size with the number of processes such that the memory requirement for each process remains constant [39, 40] is a practical way to scale the problem size since the total available memory is proportional to the number of processes, at best. For the problem at hand, the total memory requirement is $O(N^{4/3})$ and the problem size W is $O(N^2)$. Incidentally, $N^{4/3} \propto p$ implies $N^2 \propto p^{1.5}$. Therefore, fixed-memory scaling is equivalent to the fixed-efficiency scaling.

Fixed workload scaling: Gustafson et al. [20, 21] were the first to experimentally demonstrate that by scaling up the problem size, near-linear speedup could be obtained on up to 1024 processors. They introduced the *scaled speedup* metric, which is defined as the speedup obtained when the problem size is increased linearly with the number of processes. Scaled speedup increases linearly with the number of processes only when the isoefficiency function is linear, which is not the case for parallel sparse factorization. In this case, $E = \frac{1}{(1 + \frac{T_o}{W})} = \frac{1}{1 + Kp^{1/6}}$ for some constant K because $T_o \propto N^{4/3}\sqrt{p}$ and $W \propto N^2 \propto p$. Thus, the efficiency can be expected to progressively decline as the problem is

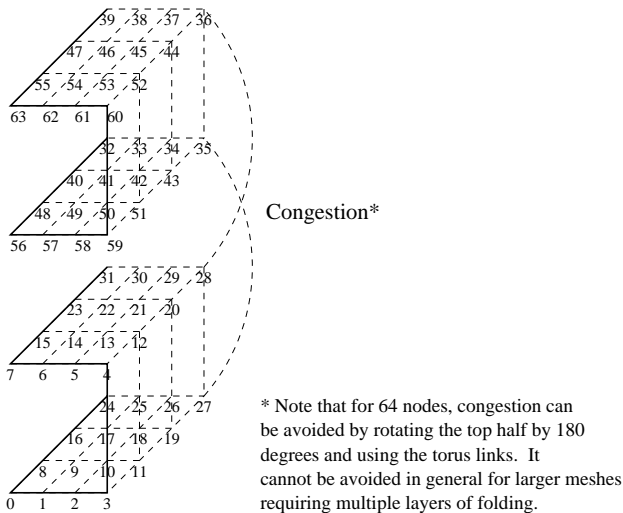


Figure 5: Example of congestion that cannot be alleviated by adaptive routing on BG/P while embedding an 8×8 2D mesh in a $4 \times 4 \times 4$ torus. Boundaries of the original mesh are shown in solid lines.

scaled in proportion to p .

Fixed time scaling: Under fixed time scaling, first studied in detail by Worley [42], the problem size is increased with p such that the parallel execution time T_P remains constant. Sun and Gustafson [38] describe a similar concept, called *sizeup*, which is the ratio of the size of the problem solved on the parallel computer to the size of the problem solved on the sequential computer in a given fixed amount of time. For our problem, the expression for T_P has two asymptotic terms, $\frac{N^2}{p}$ and $\frac{N^{4/3}}{\sqrt{p}}$. None of these should grow asymptotically in order to keep T_P fixed. The more restrictive of the two conditions on problem size growth with respect to p results from the second term and dictates that $N^{4/3} \propto \sqrt{p}$, or the problem size $W \propto N^2$ grows no faster than $O(p^{3/4})$ to keep T_P from increasing.

Fixed speed scaling: Sun and Rover [41] define *isospeed* or fixed-speed scaling, where the problem size is increased with p such that the average unit speed of computation remains constant. The isospeed metric for a parallel algorithm-machine combination can only be determined experimentally by means of data of the form shown in Table 6.

7.3 Worst case scalability analysis on BG/P

The various weak scalability analyses presented in Section 7.2 are based on Gupta et al.'s [19] $\Omega(N^{4/3}\sqrt{p})$ lower bound on the total communication overhead. These analyses represent the best-case scenario for two main reasons. First, Gupta et al.'s derivation assumes a hypercube or a two-dimensional (2D) mesh interconnection for the target parallel computer. In our case, however, the BG/P machine employs a 3D torus network. Secondly, they consider communication overhead only and do not account for the overhead due to load-imbalance. The latter, unfortunately, is hard to analyze because it depends on the permutation generated by the fill-reducing ordering heuristic.

In Sections 7.2 and 7.3, we have It may be possible to reorganize the communication in the algorithm to make optimal

use of the torus network; however, in our current implementation, the communication overhead is $O(N^{4/3}\sqrt{p})$ only on a hypercube interconnect, or on a network in which message traversal time is independent of the source and destination nodes, as long as there is sufficient bandwidth to handle all the communication volume. We use a recursive bisection based mapping of MPI processes to the BG/P nodes such that the subtree-to-subcube mapping [19] of the elimination tree works naturally on the 3D submeshes of the machine. However, within the nodes of a $k \times k \times k$ 3D submesh, the communication pattern for the factorization steps is that of a $k^{3/2} \times k^{3/2}$ 2D mesh. Folding a $k^{3/2} \times k^{3/2}$ 2D logical mesh inside a $k \times k \times k$ 3D physical mesh or torus causes congestion by a factor of $k^{1/6}$ along some edges of the physical mesh, as shown in Figure 5. BG/P uses adaptive routing for messages longer than a certain limit. However, the adaptive routing algorithm can choose only one of the shortest paths between the communicating nodes. While folding a 2D logical mesh into a 3D mesh or torus, the congestion occurs along paths between pairs of nodes that share two of the three spatial coordinates. Since there is only one shortest path between such pairs of nodes, adaptive routing is ineffective. This congestion could potentially increase the total overhead by a factor of $O(p^{1/6})$ and make it $O(N^{4/3}p^{2/3})$. Note that, this is the worst case scenario because it assumes that computation and communication are perfectly synchronized on all nodes and all $k^{1/6}$ messages along the paths with potential congestion overlap completely. In reality, the extra overhead due to congestion is likely to be probabilistic in nature, with virtually all messages getting through without much congestion for small values of k , but experiencing increasing collisions as k increases.

The bounds for various weak scaling methods under the worst-case communication overhead assumption can be derived along the lines of the analyses in Section 7.2. To maintain a fixed efficiency, the ratio of T_o and W must constant, which leads to an isoefficiency function of $O(p^2)$ when $T_o = O(N^{4/3}p^{2/3})$. If the $O(N^2)$ problem size is increased as $O(p^2)$ in order to maintain a fixed efficiency, then the $O(N^{4/3})$ memory requirement grows as $O(p^{4/3})$ and the superlinearly growing memory requirement makes it impossible to maintain fixed efficiency within fixed memory per process. Scaling the problem with fixed workload per process will result in a efficiency decline at the rate of $\frac{1}{1+Kp^{1/3}}$ for some constant K . Finally, for fixed time scaling, the problem size can be increased only as $O(\sqrt{p})$.

7.4 Comparison of empirical and analytical results

In Sections 7.2 and 7.3, we have derived expressions for several weak scaling metrics under the best- and the worst-case communication overhead assumptions. In this section, we compare these analytical results with the experimental data collected in Table 6.

Figure 6 shows three isoefficiency plots based on the (p, n) pairs that we could find in Table 6 with almost the same efficiency values. The figure also shows two hypothetical isoefficiency curves starting from the point with the smallest p of each observed curve. These curves, represented by dashed and dotted lines, correspond to isoefficiency functions of $O(p^{1.5})$ and $O(p^2)$, respectively, which are the isoefficiency functions derived from the worst- and the best-case

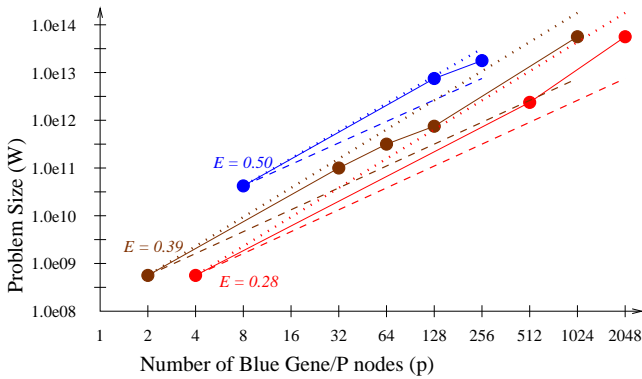


Figure 6: Some observed isoefficiency curves from the data in Table 6. The dashed and dotted lines show hypothetical curves corresponding to isoefficiency functions of $O(p^{1.5})$ and $O(p^2)$, respectively.

expressions for communication overhead. The figure shows that the observed rate at which the problem size increases with p to maintain a fixed efficiency lies between $O(p^{1.5})$ and $O(p^2)$. A close observation of the efficiency numbers along the columns of Table 6 (where the problem size is increasing at the rate of $p^{1.5}$) reveals that efficiency stays mostly constant or declines very slowly in the middle rows of the table. These rows roughly correspond to values of p between 8 and 512, and the observed isoefficiency appears to be close to the best-case $O(p^{1.5})$ growth rate of problem size in this range of p . For $p > 1024$, the isoefficient problem size growth rate appears to approach the worst-case of $O(p^2)$, possibly due to increased congestion, as discussed in Section 7.3.

Recall that we have computed the efficiency values shown in Table 6 by dividing the observed per process speed by 7.4 Gigafllops, the highest speed observed on a single process. Therefore, the isospeed and isoefficiency scalings are identical.

Figure 7 shows how the efficiency declines as the problem size is increased in proportion to the number of processes p , such that each process performs the same amount of work. The top curve corresponds to (p, n) values of (8,69), (64,97), (512,138), and (4096,195) and the bottom curve corresponds to (8,58), (64,82), (512,116), and (4096,164). These points represent a fixed work load per process because as p increases by a factor of 8, n increases by a factor of $\sqrt{2}$. Recall that $W \propto N^2 = n^6$. Sections 7.2 and 7.3 give the best- and the worst-case rates of efficiency declines, which the figure depicts by the dashed and the dotted lines, respectively. Once again, the observed data lies between the best- and worst-case analytical values.

To observe fixed time scaling, we chose (p, n) pairs from Table 6 with almost the same factorization times (see underlined factorization times in the table). The factorization time is 1.11 seconds for (2,34) and (32,48), it is roughly 3.8 seconds for (16,58), (64,69), and (256,82), and it is 2.58 seconds for (8,48) and (128,69). More groups like this can be found and it can be verified easily that in each case, the problem size increases at the rate of $p^{3/4}$. For example, for the 1.11 and 2.58 second case, a 16-fold increase in p is accompanied by an 8-fold increase in the problem size. Similarly, for the 3.8 second case, each 4-fold increase in p is accompanied by an increase in problem size by a factor of $2\sqrt{2}$.

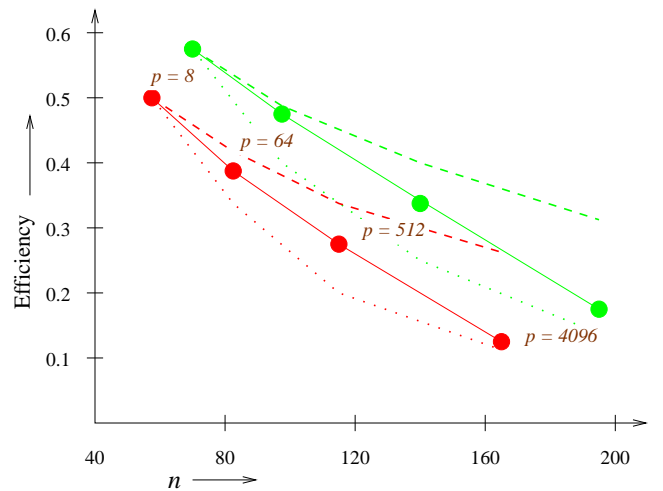


Figure 7: Efficiency as a function of 3D grid dimension n when the problem size is scaled in proportion to the number of nodes p . The dashed and dotted lines correspond to the analytical best- and worst-case rates of efficiency declines in the fixed workload per node scaling.

Note that an $O(p^{3/4})$ fixed time rate of problem size increase was predicted by the analysis in Section 7.2. If we observe any (p, n) pairs corresponding to the worst-case fixed time analysis of Section 7.3, say (64,116) and (4096,164), we see that the factorization T_P reduces from 56.6 seconds to 30.7 seconds. This suggests that the problem size can increase at a rate faster than $O(\sqrt{p})$ to maintain a fixed T_P , even for the highest values of p used.

8. CONCLUDING REMARKS

We have presented a fairly comprehensive set of experimental and analytical performance and scalability results for a direct sparse linear solver, with particular emphasis on sparse factorization—the dominant phase of the solver in terms of time and memory consumption. We have demonstrated unprecedented levels of both performance and scalability for this problem. This performance was obtained without any architecture-specific tuning of the software. In fact, we have shown similar scalability results on three very different massively parallel computers. In the future, we plan to investigate the performance and scalability of this solver on commodity and popular x86_64 clusters as well as on Petascale systems, such as NCSA’s upcoming Blue Waters [1] system.

9. ACKNOWLEDGEMENTS

We would like to thank Ritske Huismans, Eirik Thorsnes, Halvor Utby, and the University of Bergen for providing access to the Cray XT4, NCSA and the Texas A&M Supercomputing Center for access to the p5-575 clusters, and IBM for access to the BG/P. This work was partly supported by King Abdullah University of Science and Technology.

10. REFERENCES

- [1] *Blue Waters: Sustained Petascale Computing*. National Center for Supercomputing Applications, University of

- Illinois. <http://www.ncsa.uiuc.edu/BlueWaters>.
- [2] *MSC Software Products: Engineering Analysis*. MSC Software Corporation, Santa Ana, CA. <http://www.mscsoftware.com/products>.
 - [3] P. R. Amestoy, T. A. Davis, and I. S. Duff. An approximate minimum degree ordering algorithm. *SIAM Journal on Matrix Analysis and Applications*, 17(4):886–905, 1996.
 - [4] P. R. Amestoy, I. S. Duff, J. Koster, and J. Y. L'Excellent. A fully asynchronous multifrontal solver using distributed dynamic scheduling. *SIAM Journal on Matrix Analysis and Applications*, 23(1):15–41, 2001.
 - [5] P. R. Amestoy, I. S. Duff, and J. Y. L'Excellent. Multifrontal parallel distributed symmetric and unsymmetric solvers. *Computational Methods in Applied Mechanical Engineering*, 184:501–520, 2000.
 - [6] E. Chow. Parallel implementation and practical use of sparse approximate inverse preconditioners with a priori sparsity patterns. *International Journal of High Performance Computing Applications*, 15(1):56–74, 2001.
 - [7] J. J. Dongarra, J. D. Croz, S. Hammarling, and I. S. Duff. A set of level 3 Basic Linear Algebra Subprograms. *ACM Transactions on Mathematical Software*, 16(1):1–17, 1990.
 - [8] I. S. Duff and J. K. Reid. The multifrontal solution of indefinite sparse symmetric linear equations. *ACM Transactions on Mathematical Software*, 9(3):302–325, 1983.
 - [9] R. D. Falgout and U. M. Yang. *hypre*, High Performance Preconditioners: Users manual. Technical report, Lawrence Livermore National Laboratory, 2006. Paper appears in ICCS 2002.
 - [10] M. Faverge and P. Ramet. Dynamic scheduling for sparse direct solver on NUMA architectures. In *Proceedings of PARA'2008*, Trondheim, Norway.
 - [11] J. Fettig, S. Koric, and N. Sobh. A comparison of direct and iterative linear sparse solvers in computational solid mechanics. In *International Conference on Preconditioning Techniques for Large Sparse Matrix Problems*, Napa, CA, 2003.
 - [12] A. George and J. W.-H. Liu. *Computer Solution of Large Sparse Positive Definite Systems*. Prentice-Hall, NJ, 1981.
 - [13] T. George, A. Gupta, and V. Sarin. An empirical analysis of iterative solver performance for SPD systems. Technical Report RC 24737, IBM T. J. Watson Research Center, Yorktown Heights, NY, January 2009.
 - [14] J. R. Gilbert and S. Toledo. An assessment of incomplete-LU preconditioners for nonsymmetric linear systems. *Informatica*, 24(3):409–425, 2000.
 - [15] A. Gupta. A shared- and distributed-memory parallel sparse direct solver. *Applicable Algebra in Engineering, Communication, and Computing*, 18(3):263–277, 2007.
 - [16] A. Gupta. Fast and effective algorithms for graph partitioning and sparse matrix ordering. *IBM Journal of Research and Development*, 41(1/2):171–183, January/March, 1997.
 - [17] A. Gupta. WSMP: Watson sparse matrix package (Part-I: Direct solution of symmetric sparse systems). Technical Report RC 21886, IBM T. J. Watson Research Center, Yorktown Heights, NY, November 2000. <http://www.cs.umn.edu/~agupta/wsmpp>.
 - [18] A. Gupta, M. Joshi, and V. Kumar. WSMP: A high-performance serial and parallel symmetric sparse linear solver. In B. Kagstrom, J. J. Dongarra, E. Elmroth, and J. Wasniewski, editors, *PARA'98 Workshop on Applied Parallel Computing in Large Scale Scientific and Industrial Problems*. Springer Verlag, 1998.
 - [19] A. Gupta, G. Karypis, and V. Kumar. Highly scalable parallel algorithms for sparse matrix factorization. *IEEE Transactions on Parallel and Distributed Systems*, 8(5):502–520, May 1997.
 - [20] J. L. Gustafson. Reevaluating Amdahl's law. *Communications of the ACM*, 31(5):532–533, 1988.
 - [21] J. L. Gustafson, G. R. Montry, and R. E. Benner. Development of parallel methods for a 1024-processor hypercube. *SIAM Journal on Scientific and Statistical Computing*, 9(4):609–638, 1988.
 - [22] P. Hénon, P. Ramet, and J. Roman. PaStiX: A high-performance parallel direct solver for sparse symmetric definite systems. *Parallel Computing*, 28(2):301–321, 2002.
 - [23] V. E. Henson and U. M. Yang. BoomerAMG: A parallel algebraic multigrid solver and preconditioner. *Applied Numerical Mathematics: Transactions of IMACS*, 41(1):155–177, 2002.
 - [24] D. Hysom and A. Pothén. A scalable parallel algorithm for incomplete factor preconditioning. *SIAM Journal on Scientific Computing*, 22(6):2194–2215, 2000.
 - [25] M. Joshi, A. Gupta, G. Karypis, and V. Kumar. Two-dimensional scalable parallel algorithms for solution of triangular systems. In *Proceedings of the 1997 International Conference on High Performance Computing (HiPC)*, 1997.
 - [26] G. Karypis and V. Kumar. ParMETIS: Parallel graph partitioning and sparse matrix ordering library. Technical Report TR 97-060, Department of Computer Science, University of Minnesota, 1997.
 - [27] V. Kumar and A. Gupta. Analyzing scalability of parallel algorithms and architectures. *Journal of Parallel and Distributed Computing*, 22(3):379–391, 1994.
 - [28] V. Kumar and V. N. Rao. Parallel depth-first search, part II: Analysis. *International Journal of Parallel Programming*, 16(6):501–519, 1987.
 - [29] G. Lakner and C. P. Sosa. *IBM System Blue Gene Solution: Blue Gene/P Application Development*. IBM, 2008. <http://www.redbooks.ibm.com/abstracts/sg247287.html>.
 - [30] X. S. Li and J. W. Demmel. Making sparse Gaussian elimination scalable by static pivoting. In *Supercomputing '98 Proceedings*, 1998.
 - [31] X. S. Li and J. W. Demmel. A scalable sparse direct solver using static pivoting. In *Proceedings of the Ninth SIAM Conference on Parallel Processing for Scientific Computing*, 1999.
 - [32] R. J. Lipton, D. J. Rose, and R. E. Tarjan. Generalized nested dissection. *SIAM Journal on Numerical Analysis*, 16:346–358, 1979.
 - [33] J. W.-H. Liu. The role of elimination trees in sparse factorization. *SIAM Journal on Matrix Analysis and Applications*, 11:134–172, 1990.
 - [34] J. W.-H. Liu. The multifrontal method for sparse matrix solution: Theory and practice. *SIAM Review*, 34(1):82–109, 1992.
 - [35] J. W. Ruge and K. Stüben. Multigrid methods. In S. F. McCormick, editor, *Frontiers in Applied Mathematics*, volume 3, pages 73–130. SIAM, Philadelphia, PA, 1987.
 - [36] Y. Saad. *Iterative Methods for Sparse Linear Systems, 2nd edition*. SIAM, 2003.
 - [37] J. Schulze. Towards a tighter coupling of bottom-up and top-down sparse matrix ordering methods. *Bit Numerical Mathematics*, 41(4):800–841, 2001.
 - [38] X.-H. Sun and J. L. Gustafson. Toward a better parallel performance metric. *Parallel Computing*, 17(2):1093–1109, 1991.
 - [39] X.-H. Sun and L. M. Ni. Another view of parallel speedup. In *Supercomputing '90 Proceedings*, pages 324–333, 1990.
 - [40] X.-H. Sun and L. M. Ni. Scalable problems and memory-bounded speedup. *Journal of Parallel and Distributed Computing*, 19(1):27–37, 1993.
 - [41] X.-H. Sun and D. T. Rover. Scalability of parallel algorithm-machine combinations. *IEEE Transactions on Parallel and Distributed Systems*, 5(6):599–613, 1994.
 - [42] P. H. Worley. The effect of time constraints on scaled speedup. *SIAM Journal on Scientific and Statistical Computing*, 11(5):838–858, 1990.